





, .

1x 4GE-20Y-40P

1x 4HE-15Y-40P

.

-- íàðàñ-èòùâââíîä äîîîéíèòäèùîä íáíðóäîäîäèä --



R134a

68.3 kW

50 Hz / 400 V

2.0K


Auto

7.0K

5.0K

T	SST: SCT:	A				B			
		0.0°C 50.0°C				0.0°C 55.0°C			
		Qo kW	Pe kW	COP W/W	%	Qo kW	Pe kW	COP W/W	%
		70.7	24.1	2.93	103.5	64.8	25.3	2.56	94.9
1	4GE-20Y-40P	38.1	13.03	2.92	53.9	35.0	13.66	2.56	53.9
2	4HE-15Y-40P	32.6	11.08	2.94	46.1	29.9	11.63	2.57	46.1

!

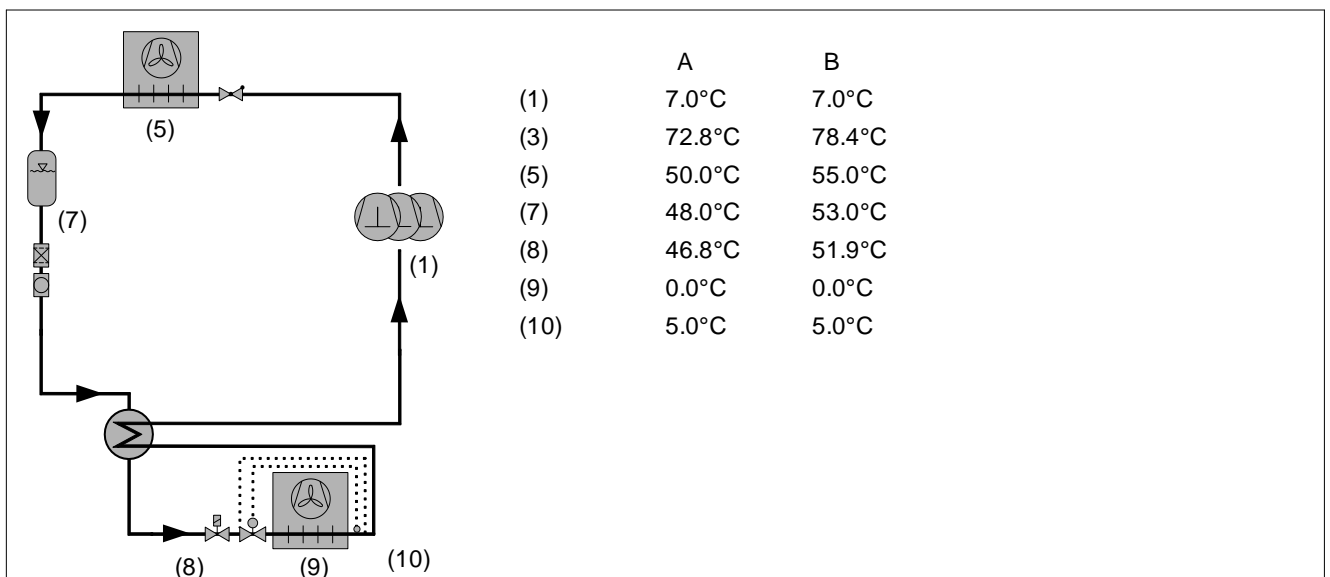



R134a

68.3 kW

50 Hz / 400 V

2.0K

Auto

7.0K

5.0K

T	SST: SCT:	A	B
		0.0°C 50.0°C	0.0°C 55.0°C
-	-	70.7 kW	64.8 kW
-	-	70.7 kW	64.8 kW
-	-	103.5 %	94.9 %
-	-	94.8 kW	90.1 kW
-	-	0.94 kW	0.91 kW
-	-	24.1 kW	25.3 kW
(400V)	-	41.5 A	43.1 A
/	-	2.93	2.56
-	-	1878 kg/h	1828 kg/h
-	-	72.8 °C	78.4 °C
-	()	46.8°C	51.9°C

!