





Version 5.3.1

13.03.2011 /

2 / 4

, .

3x 4NES-12Y-40P

.


-- íàòàñ-èòùääâîîâ äîîîéíèòâëüîâ íáíòóâîââíèâ --



R134a
 68.3 kW
 50 Hz / 400 V
 2.0K
 Auto
 7.0K
 5.0K

T	SST: SCT:	A				B			
		0.0°C	50.0°C			0.0°C	55.0°C		
		Qo kW	Pe kW	COP W/W	%	Qo kW	Pe kW	COP W/W	%
1	4NES-12Y-40P	70.8	24.3	2.91	103.6	64.1	25.2	2.54	93.9
2	4NES-12Y-40P	23.6	8.10	2.91	33.3	21.4	8.40	2.54	33.3
3	4NES-12Y-40P	23.6	8.10	2.91	33.3	21.4	8.40	2.54	33.3

!

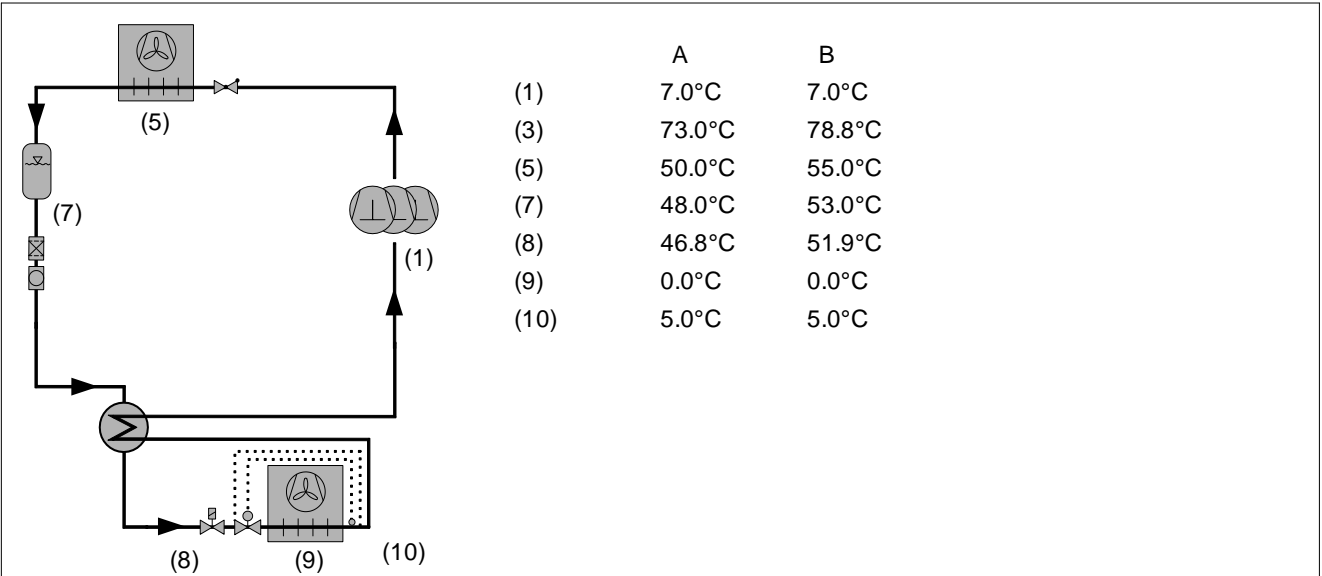



R134a

68.3 kW

50 Hz / 400 V

2.0K

Auto

7.0K

5.0K

T	SST: SCT:	A	B
		0.0°C 50.0°C	0.0°C 55.0°C
-	-	70.8 kW	64.1 kW
-	-	70.8 kW	64.1 kW
-	-	103.6 %	93.9 %
-	-	95.1 kW	89.3 kW
-	-	0.94 kW	0.90 kW
-	-	24.3 kW	25.2 kW
(400V)	-	44.4 A	45.6 A
/	-	2.91	2.54
-	-	1881 kg/h	1808 kg/h
-	-	73.0 °C	78.8 °C
-	()	46.8°C	51.9°C

!