



HSN

Version 5.3.1

26.04.2011 /

:

(ECO)

HSN5343-20

R404A

" "

T " SST  
SCT

-30°C

45°C

ECO

Auto


t . 80°C

1K

100%

400V-3-50Hz

100%

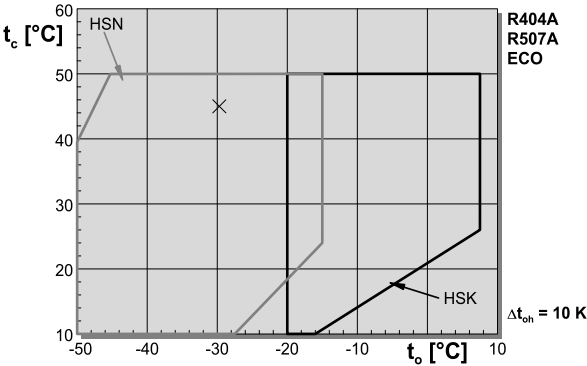

HSN5343-20-40P

-	28.8 kW
- *	30.2 kW
-	28.8 kW
.	27.1 kW
(400V)	45.0 A
	380-415V
-	51.3 kW
/	1.06
/ *	1.10
.	669 kg/h
LP	1161 kg/h
HP	ECO
.	-3.66 °C
- ( - )	491 kg/h
.	13.57 kW
-	-13.66 °C
ECO-	3.82 bar(a)
.	1.08 m /h
-	71.6 °C
-	4.66 kW
.	90.3 °C

\*/ EN12900 (10K 5K) ( . + . ) ,