



Version 5.3.1

13.03.2011 /

:

(R744)

**4TSL-20K**

R744 [CO2]

T        "        SST  
             SCT

-35°C

5°C

0K


10K

400V-3-50Hz

7.00K

-

100%

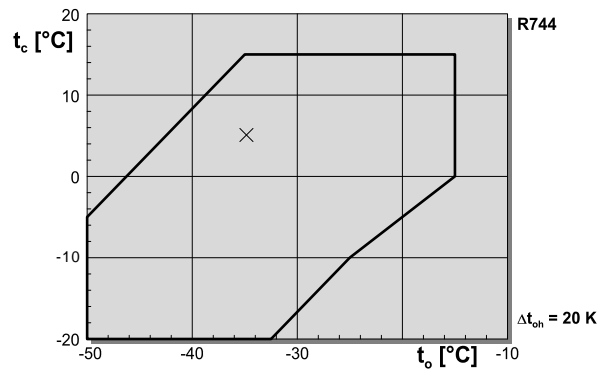

#### 4TSL-20K-40P

-	50.1 kW
- *	50.1 kW
-	49.5 kW
.	18.20 kW
(400V)	29.8 A
	380-420V
-	68.3 kW
/	2.72
/ *	2.75
.	770 kg/h
	Standard
	84.6 °C

Series production scheduled for Q3/2011. Please chose "former types".

\* EN12900 (10K , 0K )